

(Isolation Version)





#### **Document Revision History**

| Version | Date      | Remarks                         |  |
|---------|-----------|---------------------------------|--|
| V1.0    | 2024/3/28 | Initial release                 |  |
| V1.0.1  | 2025/3/11 | Change non-isolated to isolated |  |

Copyright notice

Copyright © WIZnet H.K. Ltd. All rights reserved.

Contact E-mail: supports@wiznet.hk

For more information, please visit: https://www.wizse.com/



## **Product Description:**

- WIZnet PoE module is an isolated, high-performance PoE module that complies with IEEE802.3af standards and has a product size of 38\*16\*13mm. The output power can meet the power consumption requirements of more than 90% of the market's wireless network access points; network video phones; and network advertising systems.
- 2. WIZnet PoE module requires an external network transformer for data communication.
- 3. PoE Protocol: IEEE802.3af
- 4. PoE Power: 9W (5V/1.8A)
- 5. PoE Transmission: 1,2+/3,6- and 4,5+/7,8- adaptive, the transmission distance can reach up to 100 meters.
- 6. The chip input withstand voltage can reach up to 100V, effectively preventing the main chip from burning out due to excessive voltage.

### **Product application:**

- 1. IP Camera
- 2. Access Point
- 3. IP phone
- 4. Surveillance System
- 5. Security System
- 6. NAS
- 7. Internet STB BOX
- 8. Advertisement System

## Product appearance and size: (unit: mm)

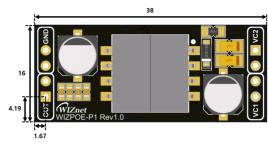


Figure 1-2 WIZPoE-P1 dimension - top view

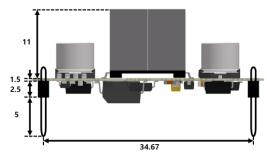


Figure 1-1 WIZPoE-P1 dimension - side view



**Absolute Maximum Rating:** 

| Parameter           | Symbol | Min | Max | Units |
|---------------------|--------|-----|-----|-------|
| DC Supply Voltage   | VCC    | 41  | 61  | V     |
| Storage Temperature | TS     | -30 | 80  | °C    |

**Electrical parameter technical standards:** 

| Indicator type     | Min   | Typical | Max   | Output<br>Ripple | Efficiency |  |
|--------------------|---|---------|-------|------------------|------------|--|
| Input<br>voltage   | 41Vdc   | 1       | 61Vdc | 100mV Max        | 80%        |  |
| The output voltage | 4.75V   | 5V      | 5.25V |                  |            |  |
| Output             | 0.3A  | -       | 1.5A  |                  |            |  |
| current            |   |         |       |                  |            |  |
| Short circuit      |   |         |       |                  |            |  |
| protection         | automatically turns off the output. When short-circuit is relieved, the |         |       |                  |            |  |
|                    | product will return to normal when the power is turned on again.        |         |       |                  |            |  |

## **Environment/humidity requirements:**


- Operating temperature and humidity requirements: At an altitude of ≤10,000 feet, the low-temperature operating lower limit is -25°C, the high-temperature operating upper limit is +45°C, and the relative humidity is 20%RH ~ 80%RH.
- 2. Storage temperature and humidity requirements: At an altitude of ≤30,000 feet, the lower limit of low-temperature storage is -30°C (freezing environment); the upper limit of high-temperature storage is +80°C, and the relative humidity is 10%RH ~ 90%RH.

#### **DC Electrical Characteristics:**

| DC Characteristic                     | Symbol | Min  | Typical | Max  | Units |
|---------------------------------------|--------|------|---------|------|-------|
| Nominal Output Voltage                | +VDC   | 4.75 | 5       | 5.25 | V     |
| Output Current (V <sub>IN</sub> = 48) | PWR    | 0.3  | -       | 1.5  | А     |
| Line Regulation                       | VLINE  | 2.5  | -       | 7.5  | %     |
| Load Regulation                       | VLOAD  | 2.5  | -       | 7.5  | %     |
| Output Ripple and Noise               | VRN    | 20   | 100     | 200  | mVp-p |
| Minimum Load                          | RLOAD  | 150  | 200     | 250  | mA    |
| Efficiency @80% Load                  | EFF    | 70   | 80      | 90   | %     |



# **PIN** definition:

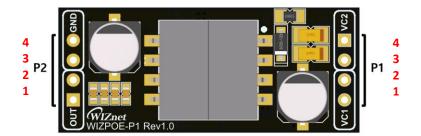

| P  | [N | Name               |                   | Description   |  |
|----|----|--------------------|-------------------|---|--|
| P1 | 1  | VC 1 (+)           |                   | RX Input (1). This input pin is used in conjunction with VC1 (-) and connects to the center tap of the transformer connected to pins 1&2 of the RJ45 connector (RX) - it is not polarity sensitive.  WIZPOE this pin is direct Input +. This pin connects to the positive (+) output of the input bridge rectifier. |  |
|    | 2  | VC 1 (-)           | PoE<br>Switch     | TX Input (2). This input pin is used in conjunction with VC1 (+) and connects to the center tap of the transformer connected to pins 3&6 of the RJ45 connector (TX) - it is not polarity sensitive.  WIZPOE this pin is direct Input This pin connects to the negative (-) output of the input bridge rectifier     |  |
|    | 3  | VC 2 (+)           |                   | Direct Input (1). This input pin is used in conjunction with VC2 (-) and connects to pin 4 & 5 of the RJ45 connector - it is not polarity sensitive.  WIZPOE this pin is direct Input +. This pin connects to the positive (+) output of the input bridge rectifier.  |  |
|    | 4  | VC 2 (-)           |                   | Direct Input (2). This input pin is used in conjunction with VC2 (-) and connects to pin 7 & 8 of the RJ45 connector - it is not polarity sensitive.  WIZPOE this pin is direct Input This pin connects to the negative (-) output of the input bridge rectifier  |  |
|    | 1  | Output 1           | POE               |   |  |
| P2 | 2  | Output 2           | Voltage<br>Output | 5V Voltage Output   |  |
|    | 3  | 3 GND 1 Ground Pin |                   |   |  |
|    | 4  | GND 2              |                   |   |  |